San Francisco State University
Department of Earth & Climate Sciences

Name _____
Spring 2018

ERTH 260: Inclass Exercise #9
CAPE and Vertical Velocity

(Due Friday 20 April 2018; 100 points)

You should work together by Tables.

Answer on separate sheet of paper in complete sentences. There should be a clear connection between your answers and the online handouts on CAPE and calculations related to CAPE.

1. The sounding for Fort Worth TX at 0000 UTC on 17 April 2016 is given below. The brown dotted line represents a lofted parcel's ascent curve. The Convective Available Potential Energy (CAPE) value for that parcel is indicated in the enclosed box at bottom left, in the upper panel, and outlined in brown. The unit is m^2/s^2.

   The LFC for this parcel is 960 m (~3000 feet) above the ground.

   The conceptual definition of CAPE is that it represents the sum of the upward acceleration due to buoyancy for each level of the atmosphere from the LFC to the EL. Assume that an air parcel is lofted to the LFC and then just one meter above the LFC.
   (a) By visual examination of the sounding and the parcel ascent curve, explain why the greatest buoyancy acceleration experienced by that parcel would occur at around the 500 mb level. (25 points)
   (b) Explain why, despite (a), the greatest upward vertical velocity due to buoyancy (sometimes called the "convective vertical velocity) will occur at the EL (which is near 200 mb in this case). (25 points)

2. The formula for the convective vertical velocity is

$$w = \left[2XCAPE\right]^{1/2}$$

   Compute the convective vertical velocity for this case. Show all steps. (25 points)

3. What is the maximum size hail stone (in diameter, either in inches or mm) that would exist, due to this vertical velocity. The tables for this are on the class website. (25 points)

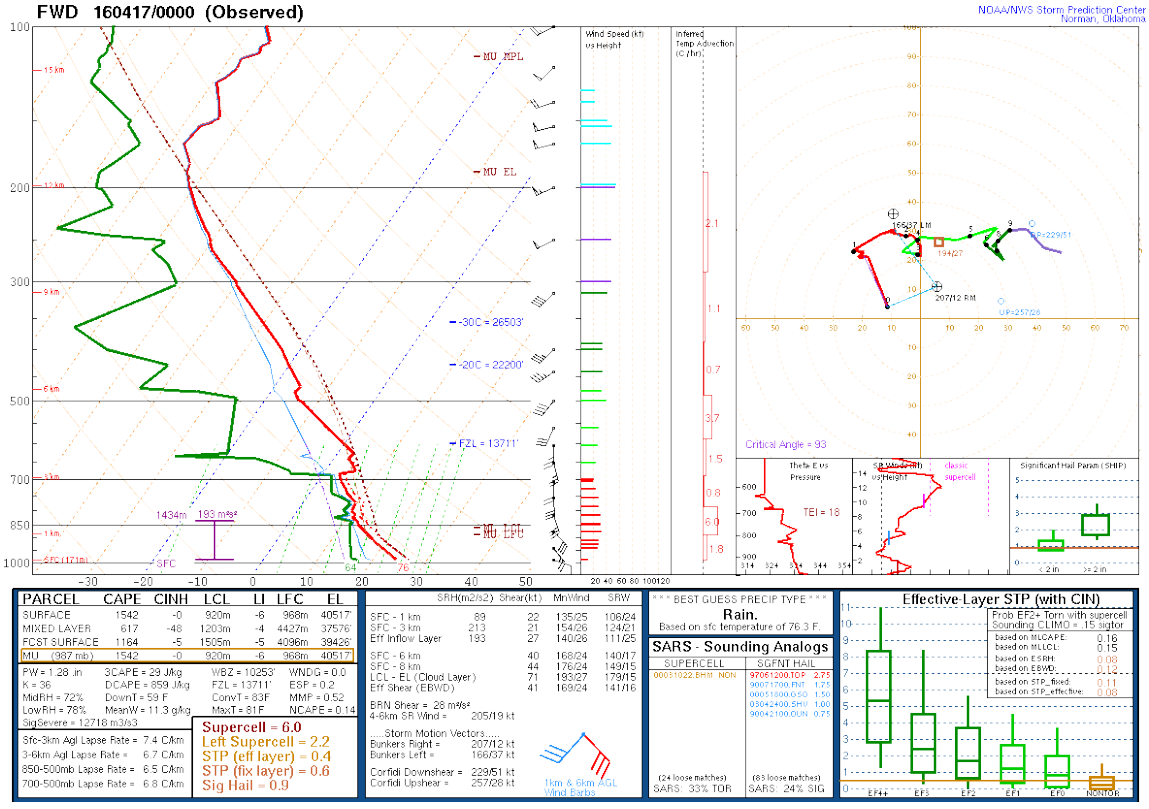

PARCEL	CAPE	CINH	LCL	LI	LFC	EL
SURFACE	1542	-0	920m	-6	968m	40517'
MIXED LAYER	617	-48	1203m	-4	4427m	37576'
FCST SURFACE	1164	-5	1505m	-5	4096m	39426'
MU (987 mb)	1542	-0	920m	-6	968m	40517'

PW = 1.28 in | 3CAPE = 29 J/kg | WBZ = 10253' | WNDG = 0.0
K = 36 | DCAPE = 859 J/kg | FZL = 13711' | ESP = 0.2
MidRH = 72% | DownT = 59 F | ConvT = 83F | MMP = 0.52
LowRH = 78% | MeanW = 11.3 g/kg | MaxT = 81F | NCAPE = 0.14
SigSevere = 12718 m3/s3

Sfc-3km Agl Lapse Rate = 7.4 C/km
3-6km Agl Lapse Rate = 6.7 C/km
850-500mb Lapse Rate = 6.5 C/km
700-500mb Lapse Rate = 6.8 C/km

Supercell = 6.0
Left Supercell = 2.2
STP (eff layer) = 0.4
STP (fix layer) = 0.6
Sig Hail = 0.9

	SRH(m2/s2)	Shear(kt)	MnWind	SRW
SFC - 1 km	89	22	135/25	106/24
SFC - 3 km	213	21	154/26	124/21
Eff Inflow Layer	193	27	140/26	111/25
SFC - 6 km		40	168/24	140/17
SFC - 8 km		44	176/24	149/15
LCL - EL (Cloud Layer)		71	193/27	179/15
Eff Shear (EBWD)		41	169/24	141/16

BRN Shear = 28 m²/s²
4-6km SR Wind = 205/19 kt

.....Storm Motion Vectors.....
Bunkers Right = 207/12 kt
Bunkers Left = 166/37 kt

Corfidi Downshear = 229/51 kt
Corfidi Upshear = 257/28 kt

1km & 6km AGL Wind Barbs

**** BEST GUESS PRECIP TYPE ****
Rain.
Based on sfc temperature of 76.3 F.

SARS - Sounding Analogs

SUPERCELL	SGFNT HAIL
00031022.BHM NON	97061200.TOP 2.75
	90071700.PNT 1.73
	00051000.OSO 1.50
	03042400.SHV 1.00
	90042100.OUN 0.75
(24 loose matches)	(83 loose matches)
SARS: 33% TOR	SARS: 24% SIG

Prob EF2+ Torn with supercell
Sounding CLIMO = .15 sigtor
based on MLCAPE: 0.16
based on MLLCL: 0.15
based on ESRH: 0.08
based on EBWD: 0.12
based on STP_fixed: 0.11
based on STP_effective: 0.08

FWD 160417/0000 (Observed)

NOAA/NWS Storm Prediction Center
Norman, Oklahoma

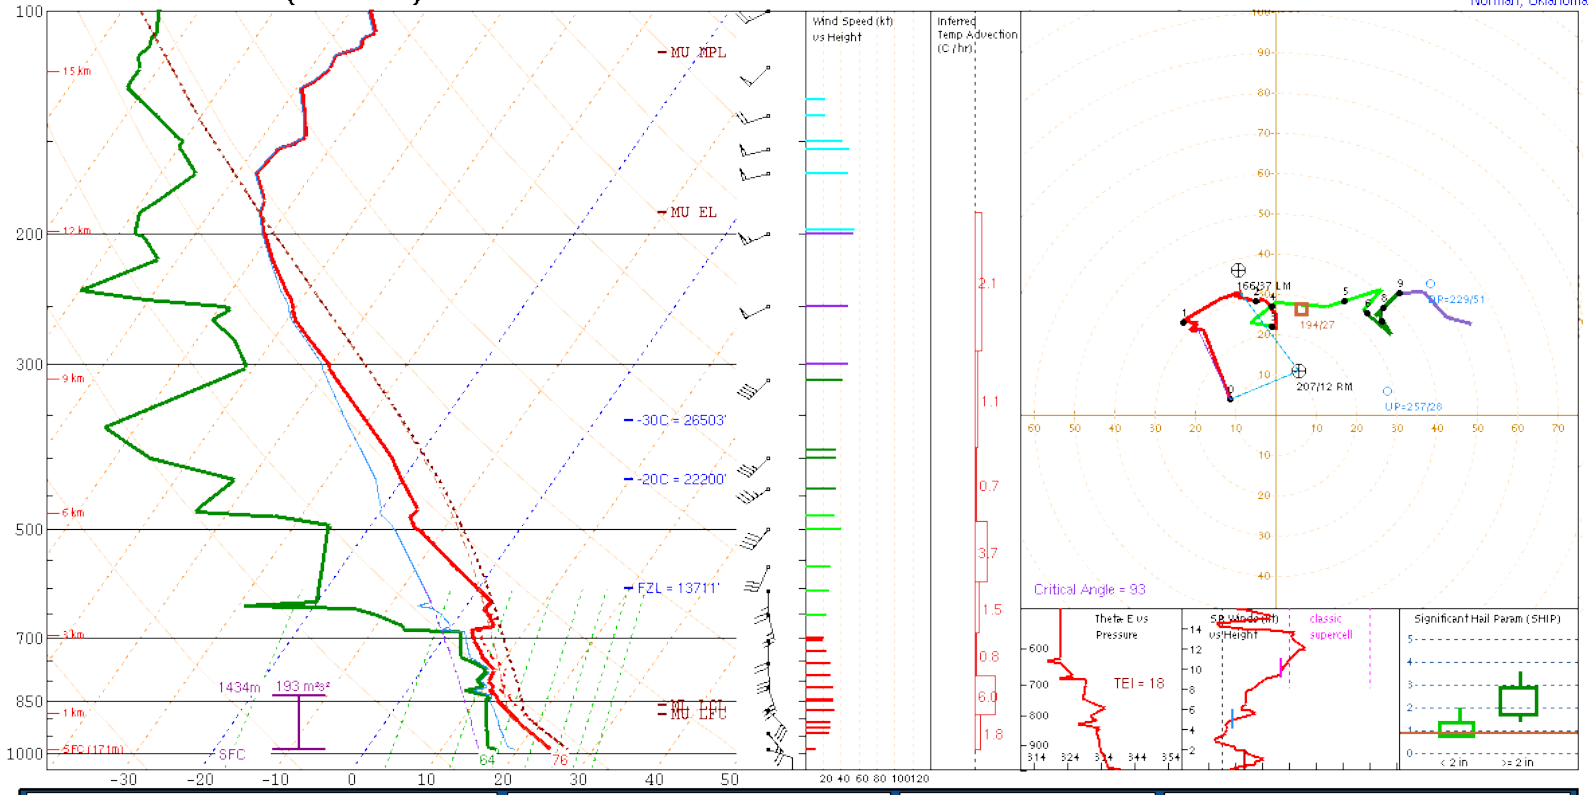

PARCEL	CAPE	CINH	LCL	LI	LFC	EL
SURFACE	1542	-0	920m	-6	968m	40517'
MIXED LAYER	617	-48	1203m	-4	4427m	37576'
FCST SURFACE	1164	-5	1505m	-5	4096m	39426'
MU (987 mb)	1542	-0	920m	-6	968m	40517'

PW = 1.28 in	3CAPE = 29 J/kg	WBZ = 10253'	WNDG = 0.0
K = 36	DCAPE = 859 J/kg	FZL = 13711'	ESP = 0.2
MidRH = 72%	DownT = 59 F	ConvT = 83F	MMP = 0.52
LowRH = 78%	MeanW = 11.3 g/kg	MaxT = 81F	NCAPE = 0.14
SigSevere = 12718 m3/s3			

Sfc-3km Agl Lapse Rate =	7.4 C/km
3-6km Agl Lapse Rate =	6.7 C/km
850-500mb Lapse Rate =	6.5 C/km
700-500mb Lapse Rate =	6.8 C/km

Supercell = 6.0
Left Supercell = 2.2
STP (eff layer) = 0.4
STP (fix layer) = 0.6
Sig Hail = 0.9

	SRH(m2/s2)	Shear(kt)	MnWind	SRW
SFC - 1 km	89	22	135/25	106/24
SFC - 3 km	213	21	154/26	124/21
Eff Inflow Layer	193	27	140/26	111/25
SFC - 6 km		40	168/24	140/17
SFC - 8 km		44	176/24	149/15
LCL - EL (Cloud Layer)		71	193/27	179/15
Eff Shear (EBWD)		41	169/24	141/16

BRN Shear = 28 m²/s²
4-6km SR Wind = 205/19 kt

.....Storm Motion Vectors.....
Bunkers Right = 207/12 kt
Bunkers Left = 166/37 kt

Corfidi Downshear = 229/51 kt
Corfidi Upshear = 257/28 kt

1km & 6km AGL Wind Barbs

*** BEST GUESS PRECIP TYPE ***
Rain.
Based on sfc temperature of 76.3 F.

SARS - Sounding Analogs

SUPERCELL	SGFNT HAIL
00031022.BHM NON	97061200.TOP 2.75
	90071700.FNT 1.75
	00051800.GSO 1.50
	03042400.SHV 1.00
	90042100.OUN 0.75
(24 loose matches)	(83 loose matches)
SARS: 33% TOR	SARS: 24% SIG

Effective-Layer STP (with CIN)

Prob EF2+ Torn with supercell
Sounding CLIMO = .15 sigtor

based on MLCAPE:	0.16
based on MLLCL:	0.15
based on ESRH:	0.08
based on EBWD:	0.12
based on STP_fixed:	0.11
based on STP_effective:	0.08